

Quick TR1300 Estación de Retrabajo Aire Caliente


Reparación inteligente, eficiente y segura, con flujo de aire constante, gran capacidad térmica y alta eficiencia. Especialmente adecuada para aplicaciones de retrabajo especiales, como baja temperatura, componentes de gran tamaño y componentes con alto consumo térmico.



▼ Especificaciones


Modelo	TR1300	TR1300A
Potencia	1300W	1300W
Voltaje	230V	230V
Rango de temperatura	100 - 500°C	100 - 500°C
Estabilidad térmica	± 2°C (Stationary air, no load)	±2°C (Stationary air, no load)
Volumen de aire	6-70 L/Min	6-70 L/Min
Tamaño exterior	215 * 230 * 155 (mm)	215 * 230 * 155(mm)
Peso	About 5kg	About 5kg
Lapiz de aire caliente Split type	√	√
Pantalla completa	√	-
Conmutación rápida de programas	√	√
Monitoreo de puesta a tierra ESD	√	√
Comunicación red	√	-
Multi-sección zona caliente	√	-
Utilidades	- Apta para retrabajo de diversos componentes, como SOIC, CHIP, QFP, SOP, PLCC, SOJ, BGA y QFN. - Aplicaciones: termorretracción, secado, eliminación de pintura, descongelación, precalentamiento, estañado adhesivo, entre otras. - Caudal de aire ajustable, adecuado para aplicaciones de calefacción con aire pequeño o grande. - Apta para retrabajo con aire caliente sin plomo.	

▼ Gestión inteligente de red

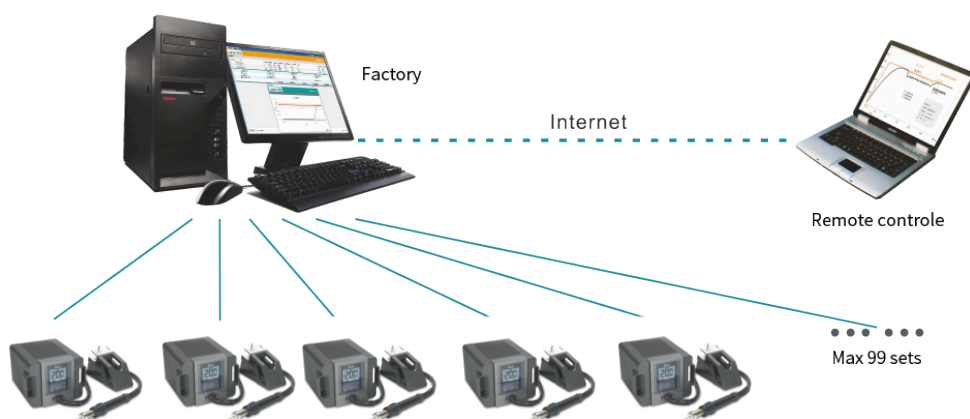

Quick nozzle replacement



 Smart Power	Large power design, ensure sufficient heating, smart distribution, maximum power up to 1300W	 Constant flow	Output constant airflow, unaffected by nozzle dimensions and nozzle tube deformation
 Zoned heating	Zone heating design, preheating and fast reworking combined together, realizing high efficiency and safety	 Auto recognition	Auto identification design, alarms if soldering iron does not match with soldering station
 Password Lock	Password lock function, preventing production process parameters from being changed with permission	 Preset Temperature	3 different temperatures can be switched fast, meeting different soldering process
 Power-off Protection	Safety design for sudden power reset to prevent automatic heating	 ESD Detection	Real-time monitoring of ESD grounding function, ensuring ESD safety of soldering products
 Auto sleep	Touch type sleep function	 Switching between °C and °F	Both Celsius and Fahrenheit degrees are available
 Software switch	Machine On-Off via software, low standby power	 Auto Shutdown	Auto power off function, decreasing consumable parts cost, saving energy
 Ultra-low power consumption			

Quick nozzle replacement

